
Bryn Twin Bar LED Wall Light

Installation Guide

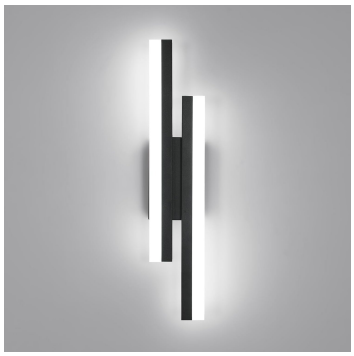

In the box

1 x twin bar wall light with integrated 3-colour LED and driver · wall mounting bracket · screws and wall plugs · terminal connector

You will need

Drill, screwdriver, pencil and spirit level. No globe needed: the LED is built in. Beside a bed, the centre of the light usually sits about 120 to 150 cm from the floor.

Important safety information

- This light must be installed by a licensed electrician, in line with AS/NZS 3000 (Wiring Rules) and local regulations.
- Turn the power off at the switchboard before installing, cleaning or servicing the light.
- Use screws and wall plugs suited to your wall (plasterboard, timber or masonry).

Step by step



1 Remove the bracket

Undo the two small side screws on the back plate and lift off the metal mounting bracket (photo 1).

2 Fix the bracket

Hold the bracket over the wall outlet, check it is level, mark, drill and screw it firmly to the wall with the plugs supplied (photo 2).

3 Connect and mount

With the power OFF, connect Active to L, Neutral to N and Earth to the earth terminal if fitted. Tuck the wires in, slide the back plate over the bracket and refit the side screws (photo 3).

4 Test

Restore the power at the switchboard and switch on the light (photo 4).

Care and cleaning

Turn the light off and let it cool. Dust the metal frame and acrylic diffusers with a soft, dry cloth. Do not use water, solvents or abrasive cleaners.

Need help?

Email hello@aussielights.com with your order number and a photo. Your light is covered by our 2-year warranty and 30-day returns.