
Celeste Fluted Glass Wall Light

Installation & care guide · Aussie Lights

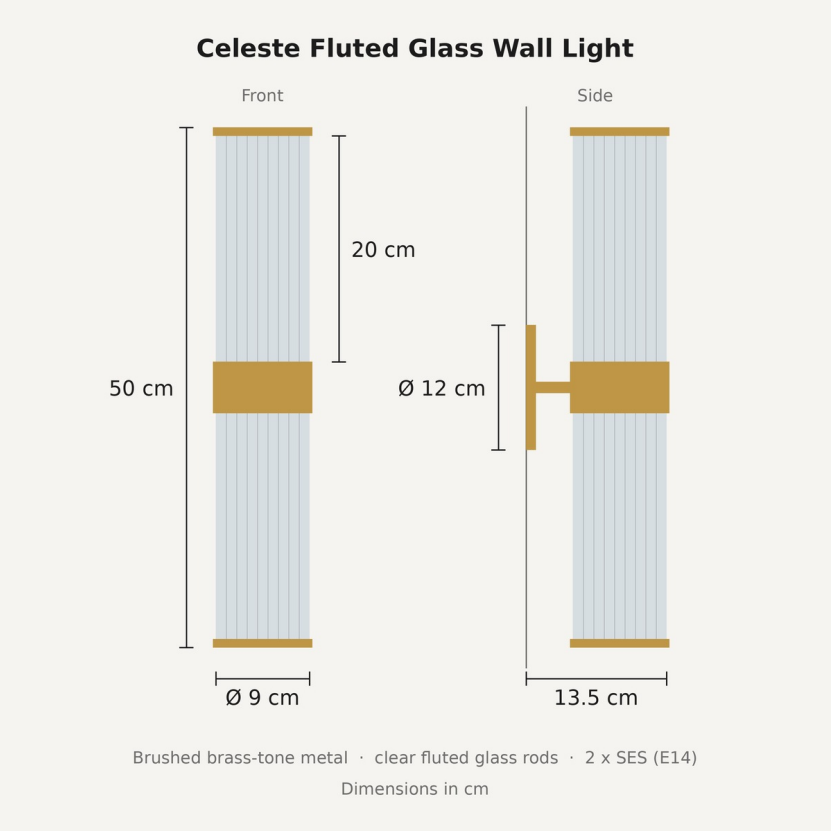

Before you start

- This is a hardwired wall light. In Australia it must be installed by a licensed electrician.
- Turn off the power at the switchboard before installation, cleaning or maintenance.
- Check that the wall can safely hold the light. Use screws and wall plugs suited to your wall (plasterboard, brick or timber).
- Indoor use in dry areas only. In a bathroom, keep it outside the shower and bath zones.
- The fluted glass rods are fragile: unpack the light on a soft surface and handle it with both hands.

In the box

- Brass-tone metal wall light with two fluted glass shades and two SES (E14) lamp holders
- Mounting bracket, screws and wall plugs

Installation steps

1. Unpack the light on a soft surface and check that nothing is missing or damaged before the electrician arrives.
2. Mark the height: the centre of the light is usually 160 to 180 cm from the floor in a hallway or living room, or about 120 to 150 cm beside a bed.
3. Fix the mounting bracket to the wall with the supplied screws, centred over the electrical outlet. Check that it is level.
4. Your electrician connects the light to the mains wiring (active, neutral and earth).

5 Fit the wall plate over the bracket and tighten the screws. Screw an SES (E14) LED globe into each holder, refit the glass shades, then restore power and test the light.

Care

- Switch off and let the light cool, then dust with a soft dry cloth.
- Wipe the glass rods with a soft cloth lightly dampened with glass cleaner. Do not use solvents or abrasive cleaners on the metal finish.
- Use LED globes of the same fitting (SES E14). Contact us if you have any issue with the light.

Need help? Contact Aussie Lights through the contact page on aussielights.com.